

We offer single source responsibility for various types of 4 side moulders.

All of our products are supremely accurate and dependable, GAU JING moulders offer top rate performance to keep your product high quality and your operation profitable.

MODEL		GN-5S23	GN-6S23
Capacity	Planing width	10-230 mm	10-230 mm
	Planing thickness	7-160 mm	7-160 mm
	Feeding speed. Inverter control	6-60 m/min	6-60 m/min
	Min length of cut	120 mm	120 mm
Spindle	Spindle speed	6000 rpm	6000 rpm
	Spindle diameter	ø40 mm	ø40 mm
	Adjustment of vertical spindle	60 mm	60 mm
	Adjustment of horizontal spindle	20 mm	20 mm
Cutter Diameter	Tool cutting circle, 1st Bottom spindle, min. to max.	ø125-160 mm	ø125-160 mm
	Tool cutting circle, vertical spindles, min. to max.	ø100-180 mm	ø100-180 mm
	Tool cutting circle, horizontal spindles, min. to max.	ø100-200 mm	ø100-200 mm
	Tool cutting circle, last bottom spindle, min. to max.	ø100-250 mm	ø100-250 mm
Motor Horsepower	Spindle motor	7.5 HP, 10 HP	7.5 HP, 10 HP
	Feeding motor. Inverter	5 HP	7.5 HP
Others	Table adjustment	12 mm	12 mm
	Infeed table length	1800 mm	1800 mm
	Feed roller diameter	ø140 mm	ø140 mm
	Feed roller width	2x50 mm	2x50 mm
	Machine dimension (LxWxH)	3650x1930x1800 mm	4250x1930x1800 mm
	Pocking dimension (LxWxH)	3800x2100x2120 mm	4400x2100x2120 mm
	Net Weight	3600 kgs	4100 kgs
	Gross Weight	4100 kgs	4700 kgs

• Specifications and design characteristics are subject to change without prior notice.

OPTIONAL EQUIPMENT:

- Spindle digital positioning controller.
- Spindle speed 7200 / 9000 RPM.
- Spindle motor increase.
- CE Specifications.
- ATS Automatic positioning.
- Feed speed 60 m/min.
- ø50mm spindle diameter.
- Extend infeed table length.



GAU JING MACHINERY INDUSTRIAL CO., LTD.

No.33, Lane 355, Pu Zei St., Feng Yuan 420, Taichung, Taiwan.
 TEL: 886-4-2527 4116 (Rep.) FAX: 886-4-2528 2376
<http://www.gaujing.com> <http://www.foursidesplaner.com>
 E-mail:g8664278@ms47.hinet.net

AGENT:

09.2011 / 2000 09-077EIS Sunway 04-2322 7907

GAU JING


Smooth Performance in Action

4 SIDE PLANER & MOULDER

GN series



- Standard Models
- For General Applications
- Moderately Priced
- Min Working Length 120 mm

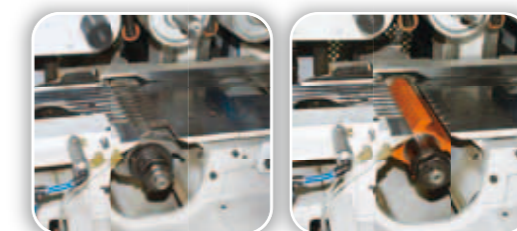

DUAL PURPOSE MOULDER

Suitable for both regular application or short woodpiece by exchanging tool only.

GAU JING GN Series 4 Side Planer & Moulder

STANDARD MODELS

FOR GENERAL APPLICATIONS

MODERATELY PRICED




Whether you produce complicated or simple profile moulding at high production rate, GAU JING new GN series 4 side planer & moulder offer unbeatable accuracy and productivity. The cast iron constructed GN series is designed and engineered to meet industry requirement for medium production and fine surface effect. The GN series promises dramatic performance gains with many fine features: Rugged constructed throughout for maximum stability: High precision

spindle creates extremely fine surface effect; Centralized air pressure regulations and centralized lubrication system for added convenience, Choose from 5 and 6 spindle configurations that best suited to your moulding work. Each one is built with GAU JING tradition of proven quality. For small runs or mass production, the GAU JING GN series gives you profitable production. For quality for price, GAU JING moulder is your only choice.


These CE certified 4 sides planer & moulder integrates many fine features and comprehensive safety guards.

The machines are quality constructed ensuring maximum dependability after years of operation.

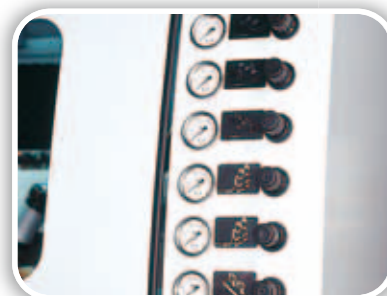

CENTRALIZED PRESSURE REGULATION

- All pressure regulations for the entire pneumatic system are centralized at front of the machine for added convenience for pressure regulations.
- Sectional pressure adjustments for all pressure rollers ensure consistent pressure.

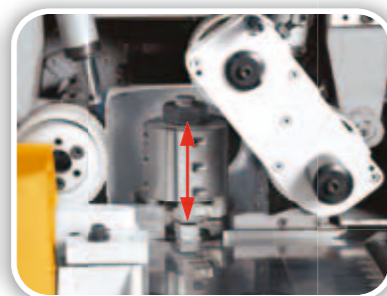

VERTICAL SPINDLE ADJUSTMENT UP TO 60 mm

It allows to fit several tools on the vertical spindle, eliminating troublesome cutter change. The 60mm spindle adjustment provides full utilization for a single cutter.



POWERED INFEED TABLE ROLLER

The roller in the infeed table is powered, providing a smooth feeding effect for hard-feeding stock.




SIDE FRONT PRESSURE PLATE ON LEFT VERTICAL SPINDLE

It fully eliminates unsmooth problem when feeding short or narrow stock. The pressure plate is easy to adjust.


5-Spindle GN-5S23

Feed motor:5HP • Elevation motor:1/2HP

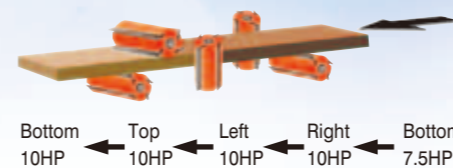


6-Spindle GN-6S23

Feed motor:7.5HP • Elevation motor:1/2HP

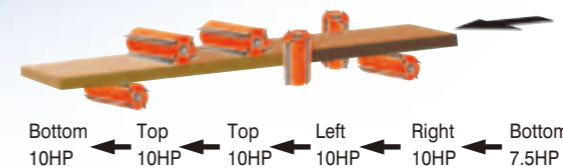

Min working length 120 mm.

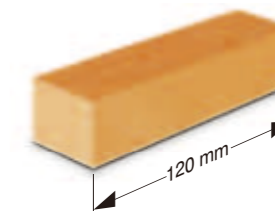

CENTRALIZED LUBRICATION

The spindles are lubricated by the centralized lubrication system for convenience.



MULTIPLE RIP SAWBLADES (OPTIONAL)

The multiple rip sawblades are available only for 6-spindle model. The sawblades are mounted on the 5th top spindle.